

RM14204

1U 4-bay NAS Server Chassis




Features & Benefits

- Supports 12Gb/s 4-port SAS/SATA backplane
- Supports up to three internal 2.5" HDD bays
- Supports up to 3 x 40mm PWM rear fans with anti-vibration mechanism
- Supports Flex ATX PSU
- HDD carrier for 2.5" or 3.5" drive
- Tool-less installation for internal 2.5" HDD
- Front access info tag for easy server management

Specification

M/B Form Factor	• Mini-ITX (6.7" x 6.7")
Dimension (D x W x H)	• 383 x 430 x 43.5 (mm), 15" x 16.9" x 1.71"
Drive Bay	• 4 x 3.5" Hot-swap HDD, Internal: 3 x 2.5"
PSU Form Factor	• Flex ATX
Indicators	• 1 x Power Status, 1 x HDD Activity, 2 x LAN Activity
Front Control	• Power On/Off, System Reset, 1 x USB2.0
Cooling Fans	• Rear: 2 x 40mm, T=28mm (Up to 3), PWM
System Security	• Intrusion Switch (Option)
Slot Opening	• N/A
Metal Thickness	• 1.0mm
Materials	• SGCC
HDD Backplane	• 12Gb/s
Net Weight	• 4.3 kg
Gross Weight	• 6.1 kg
Cubic Feet	• 2.07
Container Info.*	• 20': 400, 40': 800, 40'H: 960

*Single Packing

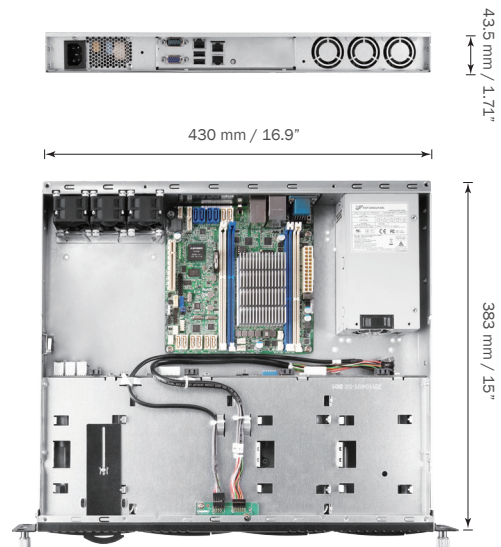

12Gb/s Backplane

P/N	• 80H10314202A0
Dimension (W x H)	• 420 x 25mm
Backplane Type	• Passive
Host Interface	• 4 x SFF-8448
HDD Interface	• 4 x SFF-8680
SAS Expander	• N/A
Tool-less Installation	• N/A
Features	• SGPIO, Temperature Monitoring, Smart Fan



Up to 3 x 40mm rear fans




Cable management

Optional Items

	Order Code	Description
Cable	83H263142-001	Intrusion switch, 600mm
Bezel	84H313710-012	1U, SilFox
Slide Rail	84H311710-095	Slide Rail, 26"
	84H311610-082	Slide Rail, 26", Tool-less

※PSU ※ M/B Support ※ I/O Gasket ※ Air Duct ※ (Detailed in CHENBRO websites)



Info tag



3 x internal 2.5" HDD bays

Order Information

Order Code	M/B	Backplane	Cooling Fan(mm)	PCI Slot	PSU	Slide Rail
RM14204T3-250	6.7" x 6.7"	12Gb/s SAS/SATA	2 x 4028	N/A	Flex ATX 250W	Option