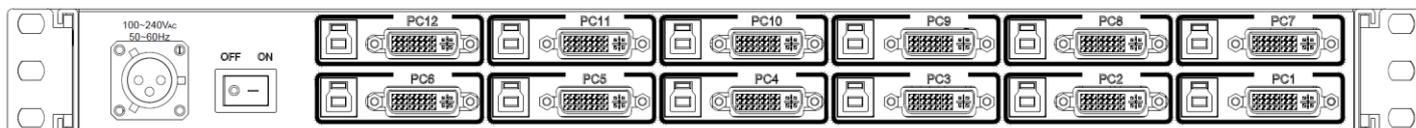USB port for Keyboard/Mouse

Features

- Meet MIL-STD-810F/G standard
- 1U 17.3" LCD drawer
- Support 1920 x 1080 FHD resolution
- Build-in 12 port DVI-D KVM switch
- Additional one USB console ports to add local KB or MS (front)
- Sealed IP65 silicone keyboard and trackball with backlight
- MIL connector for power input
- Self-locking and auto release rails for ultra convenience

Options

- DC 9~36V power input
- High brightness LCD panel, up to 1000 nits
- Front AR or EMC glass protect screen

Rear of KVM-1712SWPD-M8-Trackball

Part No.	KVM-1712SWPD-M8-Trackball		
Direct no. of Computers	12		
KVM Connectors	12		
LCD	Size	17.3"	
	Backlight	LED	
	Resolution	1920*1080 Full HD (support resolution up to 1920x1200)	
	Max.color	262K	
	Luminance	300cd/m2	
	View Angel (H/V)	140 / 120	
	Contrast Ratio	650 : 1	
Port Selection	Push Button, Hotkey		
USB Local Console	Yes, front USB for Keyboard / Mouse		
KB/Mouse Emulation	USB		
Rack Depth	500mm to 750mm (rack cabinet front rails to rear rails)		
Power	100-240V AC 50/60Hz via 3 pins lock connector		
Environment (MIL-STD-810G)	Operation temp: 0 to 50°C	(MIL-STD-810, Method 501.5 & 502.5)	
	Storage temp: -20 to 60°C	(MIL-STD-810, Method 501.5 & 502.5)	
	Humidity: 10% - 90%, non-condensing	(MIL-STD-810, Method 507.5)	
	Shock/Vibration: Procedure VI, 50G @ 11ms	(MIL-STD-810, Method 516.6)	
	Altitue: 10,000 ft Operational, 30,000 ft Storage	(MIL-STD-810, Method 500.5)	
Physical Dimensions / Net Weights	482x43x520mm (WxHxD) /11KG		
Packing Dimensions / Gross weights	690x210x780mm (WxHxD) /17KG		

Accessories	
1 x 1.8 Power Cord with lock connector	

Option Relate Item	
CD-018	1.8meter DVI-D Cable
CU-018	1.8meter USB Cable