

2 & 4 ports Combo KVM

Optimize rack space. Maximize rack monitoring

KSC-102U




KSC-104U



Features

- Plastic case
- Support multiplatform – PS/2 and USB computers (SUN and MAC)
- Support USB keyboard and mouse (console)
- Support DOS, Windows, Netware, Unix, Linux, Mac OS
- Hot Pluggable - Add or remove connected PCs without powering down the KVM switch or PCs.
- Superior video quality - Up To 1920X1440
- No software required - easy PC selection via Push Buttons or Hot Keys
- Auto Scan Mode for monitoring PCs
- Keyboard and mouse emulation for error free booting
- Keyboard status restored when switching PCs
- LED Display for easy status monitoring
- Buzzer sound for switching port confirmation
- AC to DC power adapter

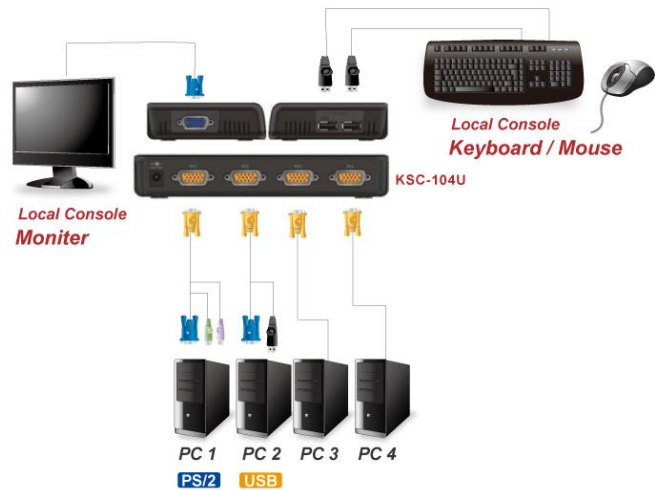

Part No.	KSC-102U	KSC-104U
No. of Computers	2	4
Console connections	1	1
KVM port connector	HD DB15 Female	
Local Console	1x HD DB15 for VGA (up to 1920x1440 resolution) 2x USB Type A for KB / Mouse	
PC selection	Hot key / push button	
Compatibility	Support DOS, Windows, Netware, Unix, Linux, Mac OS	
Power	AC to DC power adapter	
Environment	Operation temp.: 0 to 50°C Storage temp.: -20 to 60°C Humidity : 10% - 90%, non-condensing	
Physical Dimensions / Net Weights	158mm (W) x 74mm (D) x 25mm (H) / 262g	198mm (W) x 74mm (D) x 25mm (H) / 330g

Relate Items

CVU-018	1.8meter 2-in-1 KVM Cable - USB & VGA	CVP-018	1.8meter 2-in-1 KVM Cable – PS/2 & VGA
CVU-030	3.0meter 2-in-1 KVM Cable - USB & VGA	CVP-030	3.0meter 2-in-1 KVM Cable – PS/2 & VGA
CVU-050	5.0meter 2-in-1 KVM Cable - USB & VGA	CVP-050	5.0meter 2-in-1 KVM Cable – PS/2 & VGA