

# DSRD



Rugged 2U rackmount drawer with dual-screen LCD monitors at 17.3", 19", or 23". The displays fold together and rotate close into the drawer for slide in storage.

It is an ideal match in military transit case applications and command & control centers. The compact 2U rackmount display drawer uses a secure all-aluminum monitor mounting and stabilization design necessary for robust government & defense, communications and industrial automation applications. It is also designed for server room applications.



## Technical Specifications






Model	DSRD 17A	DSRD 17"	DSRD 19"	DSRD 23"
<b>Dimensions/Weight</b>	3.46" x 17.76" x 25.89" (H x W x D) / 48 Lbs 88mm x 451.2mm x 657.6mm (H x W x D) / 21 kg		3.46" x 17.76" x 25.89" (H x W x D) / 53 Lbs 88mm x 451.2mm x 657.6mm (H x W x D) / 24 kg	3.43" x 19.60" x 32.23" (H x W x D) / 60 Lbs 87.3mm x 497.8mm x 818.6mm (H x W x D) / 27 kg
<b>Display</b>	2x 17.3", 16:9 Display 1920x1080		2x 19", 5:4 Display 1280x1024	2x 23", 16:9 Display 1920x1080
<b>Display Deployment</b>	Displays rotate up from stowed position, rotate & open via butterfly action and slide to center the two displays on the operator			
<b>Display Tilt</b>	Displays tilt ~10° from vertical for optimal operator positioning			
<b>Signal Inputs</b>	Analog VGA, DVI-D, HD-SDI, S Video-In for each display	Analog VGA, DVI-D, HDMI Displayport for each display		
<b>Display Adjustment</b>	Individual brightness, contrast, color temperature adjustments			
<b>USB Pass Through</b>	2x USB pass through inputs on the front panel	Internal USB 2.0 hub with 2x inputs on the front panel and a single USB 2.0 on the rear		
<b>Keyboard</b>	101-key pull out backlit keyboard			
<b>Pointing Device</b>	Resistive touchpad			
<b>Input Power</b>	18 - 36VDC	115/230 VAC, 50/60Hz, 100W Max		
<b>Internal</b>	Teflon coated wires	5-minute backup, internal battery, switch over indicator		

Specs subject to change. Customizations available through sales rep.

## Environmental Specifications

<b>Temperature: MIL-STD-810E (501.4, 502.4)</b>	Operating: 0 ~ 50°C Non-Operating: -40 ~ 70°C
<b>Humidity: MIL-STD-810E (507.2)</b>	Relative Humidity: 5% to 95% operating, non-condensing
<b>Altitude: MIL-STD-810E (500.3)</b>	Operating: 15,000 ft (4571.8 m) Non-Operating: 40,000 ft (12,192 m)
<b>Vibration: MIL-STD-810E (514.4)</b>	Operating: 10 to 500 Hz 1.04 g (RMS)
<b>Shock: MIL-STD-810E (516.4)</b>	Operating: 15 G, 8 ms 1/2 sine Non-Operating: 40 G, 8 ms 1/2 sine Drop: 4" stand alone, 39" transit drop in transit case
<b>Compliance</b>	CE, FCC, UL, CCC, ROHS

# DSRD 17

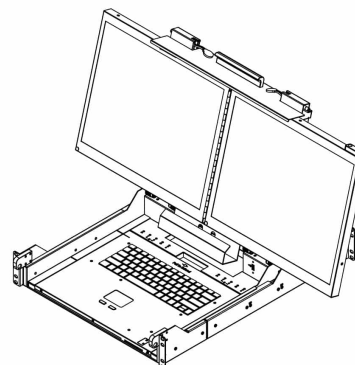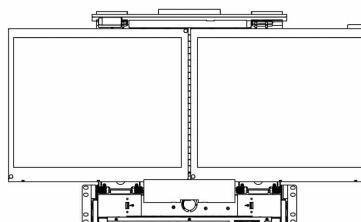
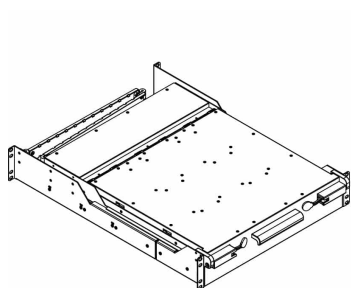


**SAIS - Sacasa Industries & Systèmes**  
8 rue André Marie Ampère  
28500 Vernouillet - France  
09 70 440 600 - (+ 33) 970 440 600  
<https://clavier-ecran-rackable.fr>  
[contact@sacasa.info](mailto:contact@sacasa.info)


# DSRD 17A



DSRD 23

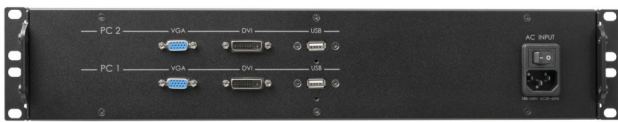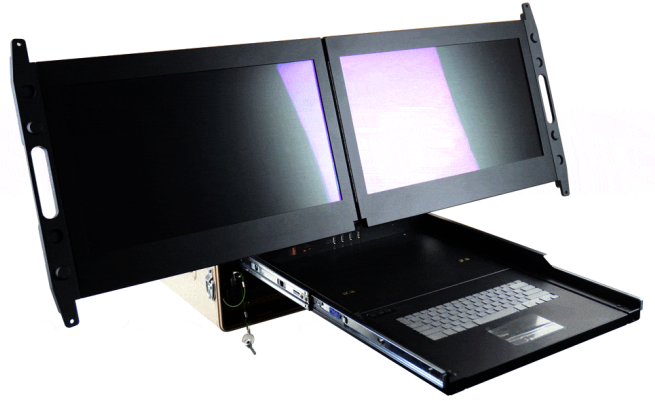

# DSRD 19

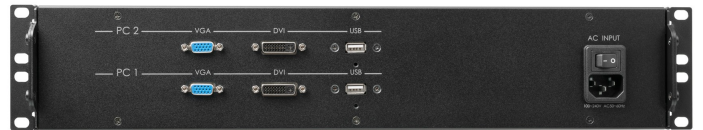

**SAIS - Sacasa Industries & Systèmes**  
8 rue André Marie Ampère  
28500 Vernouillet - France  
09 70 440 600 - (+ 33) 970 440 600  
<https://clavier-ecran-rackable.fr>  
[contact@sacasa.info](mailto:contact@sacasa.info)

