



CAT6 LCD Console Drawers with IP module

Optimize rack space. Maximize rack monitoring

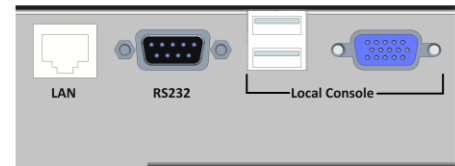

Features

- Integrated with 17" or 19" 1280 x 1024 LCD panel.
- Support interface VGA-USB.
- Up to 40 meters between Servers to KVM.
- Built in IP module for remote access (remote user video resolution up to 1920 x 1080 @ 60Hz).
- Additional one USB Local console to add local KB/Mouse & VGA.
- Durable 104-key keyboard and touch pad.
- Quick and simple installation.
- Self-locking and auto release rails for ultra-convenience.
- Port selection via push buttons or On-Screen-Display (OSD).
- Dedicated daisy chain port to expand up to 256 servers.
- Access Control List (ACL) security function for up to 8 independents user accounts.



Rear of KVM-1708/1908ASL-M2-BIP

Rear of KVM-1716/1916ASL-M2-BIP

Rear of KVM-1732/1932ASL-M2-BIP

Part No.	KVM-1708ASL-M2-BIP	KVM-1716ASL-M2-BIP	KVM-1732ASL-M2-BIP	KVM-1908ASL-M2-BIP	KVM-1916ASL-M2-BIP	KVM-1932ASL-M2-BIP
Direct no. of Computers	8	16	32	8	16	32
Maximum no. of Computers	232(Daisy Chain)	240(Daisy chain)	256(Daisy chain)	232(Daisy Chain)	240(Daisy chain)	256(Daisy chain)
LCD	Size	17"			19"	
	Backlight	LED			LED	
	Resolution	1280*1024			1280*1024	
	Max. color	16.7M			16.7M	
	Luminance	250cd/m2			250cd/m2	
	View Angel (H/V)	176 / 170			170 / 160	
	Contrast Ratio	1000 : 1			1000 : 1	
Port Selection	Push Button, OSD or Hotkey					
USB Local console	Yes , USB x2 for KB/ Mouse , VGA x1					
IP module	Yes, remote user video resolution up to 1920 x 1080 @ 60Hz					
Max. Computer Distance	40 meters (Servers to KVM)					
KB/Mouse Emulation	USB					
Rack Depth	500mm to 1100mm (rack cabinet front rails to rear rails)					
Power	100-240V AC 50/60Hz via IEC Type power cord					
Environment	Operation temp: 0 to 50℃ Storage temp: -20 to 60℃ Humidity: 10% - 90%, non-condensing Shock: 10G acceleration (11ms duration) Vibration: 17 to 500Hz 1G PTP					
Physical Dimensions / Net Weights	448x42x580mm (WxHxD) / 12.0KG			448x42x580mm (WxHxD) / 12.5KG		
Packing Dimensions / Gross weights	715x140x780mm (WxHxD) / 18.0KG			715x140x780mm (WxHxD) / 18.5KG		

Accessory

1.8meter IEC Type Power Cord

Option Relate Item

DGU	CAT6 KVM Dongle-USB&VGA	DVI changer	DVI-to-VGA changer
DP changer	DisplayPort-to-VGA changer	HDMI changer	HDMI-to-VGA changer

SAIS - Sacasa Industries & Systèmes

8 rue André Marie Ampère

28500 Vernouillet - France

09 70 440 600 - (+ 33) 970 440 600

<https://clavier-ecran-rackable.fr>

contact@sacasa.info