

Combo DB15 LCD Console Drawers Screen Rotate Version

Optimize rack space. Maximize rack monitoring



The SAIS range of LCD console drawers provides a variety of features


that simplify to access servers to making system monitoring, troubleshooting and software upgrades.

The self-locking rails when in the fully extended/open position and the ultra convenient auto lock release when the LCD panel is closed, make for simple and hassle free operation.


Configure with 21.5 or 23.8 inch A-Grade FHD LCD panels, combo DB15 8 or 16 port integrated KVM switch & with an option remote IP console.

Features

- Facilitated by screen rotate function.
- Support combo interface, GA-USB & VGA-PS/2.
- Durable 104-key keyboard and touch pad.
- Quick and simple installation.
- Self-locking and auto release rails for ultra convenience.
- Port selection via push buttons or On-Screen-Display (OSD).
- Dedicated daisy chain port to expand up to 240 servers.
- Access Control List (ACL) security function for up to 8 independent user accounts.



Rear of KVM-2108AST-M5
Rear of KVM-2408AST-M5



Rear of KVM-2116AST-M5
Rear of KVM-2416AST-M5

Part No.			KVM-2108AST-M5	KVM-2116AST-M5		KVM-2408AST-M5	KVM-2416AST-M5
Direct no. of Computers			8	16		8	16
Maximum no. of Computers			232(Daisy Chain)	240(Daisy chain)		232(Daisy Chain)	240(Daisy chain)
LCD	Size	21.5"			23.8"		
	Backlight	LED			LED		
	Resolution	1920*1080 FULL HD (support up to 1920*1200)			1920*1080 FULL HD (support up to 1920*1200)		
	Max.color	16.7M			16.7M		
	Luminance	250cd/m2			250cd/m2		
	View Angel (H/V)	178 / 178			178 / 178		
	Contrast Ratio	3000 : 1			1000 : 1		
Port Selection			Push Button, OSD or Hotkey			Push Button, OSD or Hotkey	
Expansion Slot			Yes, option for Remote IP Access			Yes, option for Remote IP Access	
KB/Mouse Emulation		USB & PS2					
Rack Depth		600mm to 1300mm (rack cabinet front rails to rear rails)					
Power		100-240V AC 50/60Hz via IEC Type power cord					
Environment		Operation temp: 0 to 50℃ Storage temp: -20 to 60℃ Humidity: 10% - 90%, non-condensing Shock: 10G acceleration (11ms duration) Vibration: 17 to 500Hz 1G PTP					
Physical Dimensions / Net Weights		448 x 44 x 790mm (WxHxD) / 19.5KG					
Packing Dimensions / Gross weights		580 x 195 x 940mm (WxHxD) / 23KG					
Accessory							
1.8meter IEC Type Power Cord (1.8meter VGA& PS2Cable + 1.8meter USB A Type Cable for KVM-2401AST-M5)							
Option Relate Item							
CVU-018	1.8meter 2-in-1 KVM Cable-USB&VGA			CVP-018	1.8meter 3-in-1 KVM Cable-PS/2&VGA		
CVU-030	3.0meter 2-in-1 KVM Cable-USB&VGA			CVP-030	3.0meter 3-in-1 KVM Cable-PS/2&VGA		
CVU-050	5.0meter 2-in-1 KVM Cable-USB&VGA			CVP-050	5.0meter 3-in-1 KVM Cable-PS/2&VGA		

SAIS - Sacasa Industries & Systèmes
 8 rue André Marie Ampère
 28500 Vernouillet - France
 09 70 440 600 - (+ 33) 970 440 600
<https://clavier-ecran-rackable.fr>
contact@sacasa.info

Combo DB15 LCD Console Drawers Screen Rotate Version

Optimize rack space. Maximize rack monitoring




Lift the display




Display rotate to the right



Operating position

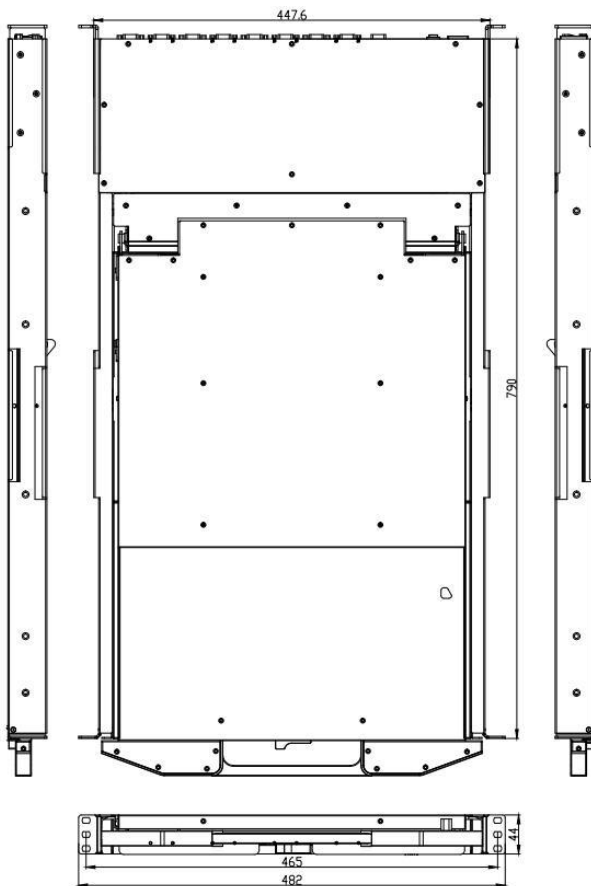

Rear of KVM-2108AST-M5
Rear of KVM-2408AST-M5



Rear of KVM-2116AST-M5
Rear of KVM-2416AST-M5

