

Combo DB15 LCD Console Drawers

Screen Rotate Version

Optimize rack space. Maximize rack monitoring



LCD console drawers provide a variety of features that simplify to access servers to making system monitoring, troubleshooting and software upgrades.

The self-locking rails when in the fully extended/open position and the ultra convenient auto lock release when the LCD panel is closed, make for simple and hassle free operation.

Configure with 21.5 or 23.8 inch A-Grade FHD LCD panels, combo DB15 8 or 16 port integrated KVM switch & additional one USB local console.

Features

- Facilitated by screen rotate function.
- Support combo interface, VGA-USB & VGA-PS/2.
- Additional one USB Local console to add local KB/Mouse & VGA.
- Durable 104-key keyboard and touch pad.
- Quick and simple installation.
- Self-locking and auto release rails for ultra convenience.
- Port selection via push buttons or On-Screen-Display (OSD).
- Dedicated daisy chain port to expand up to 240 servers.



Rear of KVM-2108AST-M5/ULC
KVM-2408AST-M5/ULC



Rear of KVM-2116AST-M5/ULC
KVM-2416AST-M5/ULC

Part No.		KVM-2108AST-M5/ULC	KVM-2116AST-M5/ULC	KVM-2401AST-M5/ULC	KVM-2408AST-M5/ULC	KVM-2416AST-M5/ULC
Direct no. of Computers		8	16	1	8	16
Maximum no. of Computers		232(Daisy Chain)	240(Daisy chain)	1	232(Daisy Chain)	240(Daisy chain)
LCD	Size	21.5"		23.8"		
	Backlight	LED		LED		
	Resolution	1920*1080 FULL HD		1920*1080 FULL HD		
	Max.color	16.7M		16.7M		
	Luminance	250cd/m2		250cd/m2		
	View Angel (H/V)	178 / 178		178 / 178		
Contrast Ratio		3000 : 1		1000 : 1		
Port Selection		Push Button, OSD or Hotkey		N/A	Push Button, OSD or Hotkey	
USB Local console		Yes , USB x2 for KB/ Mouse , VGA x1				
KB/Mouse Emulation		USB & PS2				
Rack Depth		600mm to 1300mm (rack cabinet front rails to rear rails)				
Power		100-240V AC 50/60Hz via IEC Type power cord				
Environment		Operation temp: 0 to 50°C Storage temp: -20 to 60°C Humidity: 10% - 90%, non-condensing Shock: 10G acceleration (11ms duration) Vibration: 17 to 500Hz 1G PTP				
Physical Dimensions / Net Weights		448 x 44 x 790mm (WxHxD) / 19KG		448 x 44 x 790mm (WxHxD) / 19.5KG		
Packing Dimensions / Gross weights		580 x 195 x 940mm (WxHxD) / 22.5KG		580 x 195 x 940mm (WxHxD) / 23KG		
Accessory						
1.8meter IEC Type Power Cord						
Option Relate Item						
CVU-018	1.8meter 2-in-1 KVM Cable-USB&VGA	CVP-018	1.8meter 3-in-1 KVM Cable-PS/2&VGA			
CVU-030	3.0meter 2-in-1 KVM Cable-USB&VGA	CVP-030	3.0meter 3-in-1 KVM Cable-PS/2&VGA			
CVU-050	5.0meter 2-in-1 KVM Cable-USB&VGA	CVP-050	5.0meter 3-in-1 KVM Cable-PS/2&VGA			

SAIS - Sacasa Industries & Systèmes
 8 rue André Marie Ampère
 28500 Vernouillet - France
 09 70 440 600 - (+ 33) 970 440 600
<https://clavier-ecran-rackable.fr>
contact@sacasa.info

Combo DB15 LCD Console Drawers Screen Rotate Version

Optimize rack space. Maximize rack monitoring




Lift the display



Display rotate to the right



Operating position

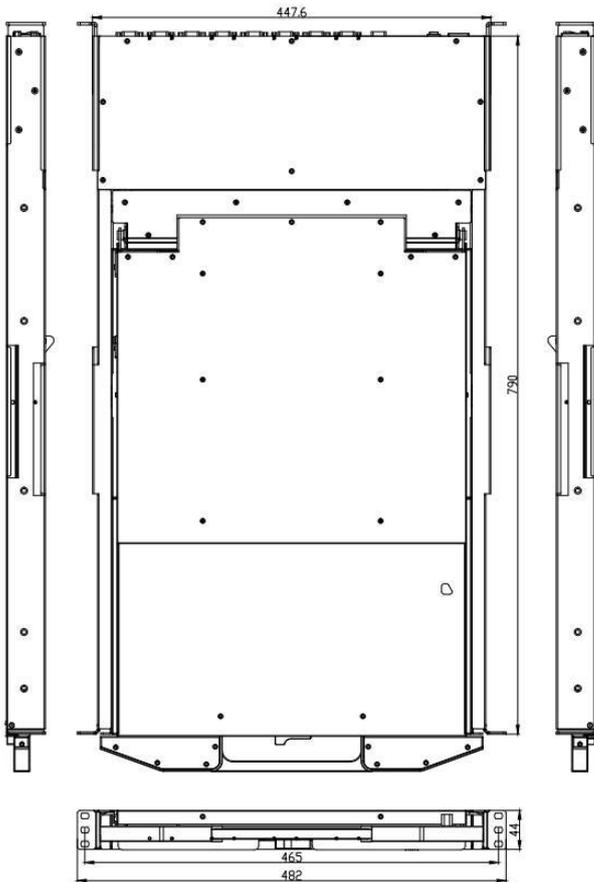

Rear of KVM-2108AST-M5/ULC
KVM-2408AST-M5/ULC



Rear of KVM-2116AST-M5/ULC
KVM-2416AST-M5/ULC

