

Rack Mount Triple LCD Drawer (screen pivot)

Model # RMD-24W-T3

Features

- 2.5U foldable triple 23.8" widescreen LCD display Drawer
- Triple DVI & VGA Port
- native 1920 x 1080 FHD resolution
- Build in 2x 2 watts speakers
- Independent front osd control buttons to optimized display

Option

- Composite video input
- HDMI or Display port input
- 3G / HD / SD-SDI broadcast grade input
- DC 9~36 V power input
- AR Hardness glass
- Touch screen



LCD Characteristics :

Screen Size	Triple 23.8"
Backlight Type	LED
Native Resolution	1920 x 1080
Contrast Ratio	1000:1
Brightness (cd/m2)	250
View Angles (H/V)	178/178
Pixel Size (HxV) mm	0.2745x0.2745
Max. Color	16.7M

Input Signals:

DVI-D	Triple DVI-D 24Pin Connector (Female)
VGA	Triple D-SUB 15Pin Connector (Female)
Audio	1x 3.5" Jack
Power Input	Standard IEC Inlet
Touch-USB (option)	Triple USB A Type connector
Touch-RS232 (option)	Triple D-SUB 9P connector (Female)

Power Specifications :


AC Power Input	Standard IEC Type Power Cord with Internal Power adapter, 100-240V AC Input
Wide Range DC Power Input (option)	Screw Type Terminal Block with internal wide Range DC 9-36V power module

User Controls Interface:

Power ON / OFF via Front Button
Power Mode Status LED indicator
OSD (On Screen Display) Buttons

Mechanical and Environment:

Height	2.5U Foldable
Rack Depth	30" to 40" (cabinet front rail to rear rail)
Construction	Metal Housing
Operating Temperature	0 - 50 deg. C
Operating Humidity	10% - 90% (non -condensing)
Anti-Vibration	5 - 500 Hz / 1 Grms PTP
Anti-Shock	15G / Peak (11 ms)
Physical Dimension (WxHxD)	443 x 113 x 762 (mm)
Packing Dimension (WxHxD)	730 x 440 x 1050 (mm)
Net Weight / Gross Weight	37/68 (KGs)
Certification and Approvals	CE / FCC / RoHS

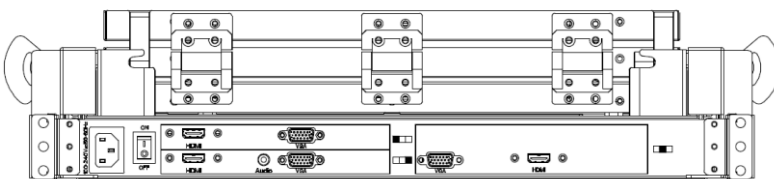

Rear of RMD-24W-T3

