



# CAT6 KVM Extender Transmitter & Receiver

150/300 meter ( 500/1000 feet )



## Features ▼


- Remote console up to 150M / 300M ( 500 / 1000 feet ) away with superior auto-adjust RGB signal capability
- Dual user access at remote side, support USB/PS2 combo
- Switch computers by push button or hot key commands
- Audible feedback when switching
- LED indicators for computer status or data transmission
- Pure hardware solution makes network independent
- Plug-and-Play , no software required

**Transmitter**  
( DCC-150T/300T )

**Receiver**  
( DCC-150R/300R )



## Diagram ▼

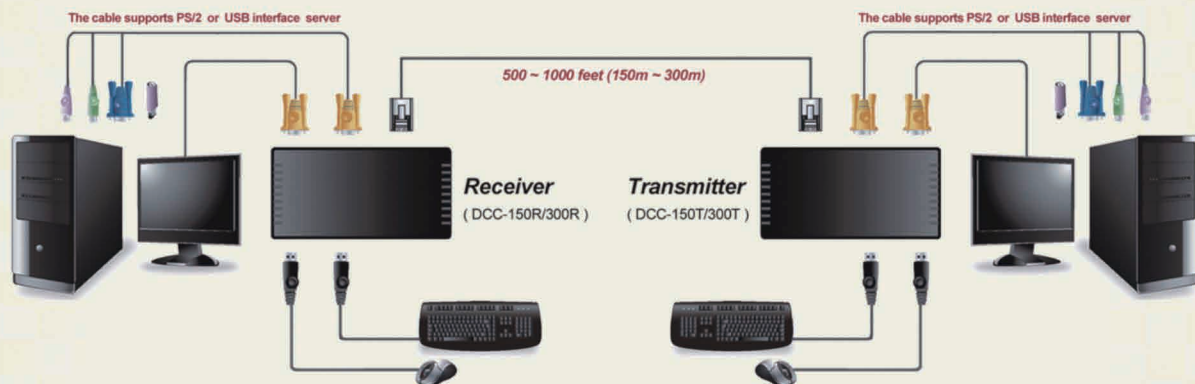

## Specification ▼

	Transmitter ( DCC-150T/300T )	Receiver ( DCC-150R/300R )
USB Connector	2 x USB for KB& Mouse	
DB-15 Connector	1 for VGA Monitor , 1 for VGA & Combo KB/ Mouse	
RJ-45 Connector	8P8C	
LEDs	2 ( Power / on line )	2 ( Local / Remote )
Port selection	N/A	Hot key / Push button
Security	User name and Password ( only for DCC-300T/R )	
OSD	Hotkey , Status ( only for DCC-300T/R )	
VGA Resolution ( Local Host )	1920 x 1440	
VGA Resolution ( Remote Host )	1280 x 1024 ( DCC-150T/R ) / 1024 x 768 ( DCC-300T/R )	
Housing	Metal	
Power	100~240VAC, 50/60HZ via AC/DC cord	
Operation Temperature	0 to 50°C	
Storage Temperature	-20 to 60°C	
Humidity	90%,non-condensing	
Certificated	CE / FCC	
Dimension		
Weight		